

Unique Pattern Matching in Strings

Stijn Vansummeren^{*}

University of Limburg - Belgium
`stijn.vansummeren@luc.ac.be`

Abstract. Regular expression patterns are a key feature of document processing languages like Perl and XDuce. It is in this context that the first and longest match policies have been proposed to disambiguate the pattern matching process. We formally define a matching semantics with these policies and show that the generally accepted method of simulating longest match by first match and recursion is incorrect. We continue by solving the associated type inference problem, which consists in calculating for every subexpression the set of words the subexpression can still match when these policies are in effect, and show how this algorithm can be used to efficiently implement the matching process.

^{*} Research Assistant of the Fund for Scientific Research - Flanders (Belgium)

1 Introduction

Using regular (tree) expression patterns to extract relevant data from a string (or tree) is a highly desirable feature for programming languages supporting document transformation or data retrieval. Indeed, it is a core feature of Perl [1] and has recently been proposed in the context of the XML programming language XDuce [2, 3]. The matching process consists of two parts: (1) ensuring that the input belongs to the language of the expression; and, (2) associating with every subexpression the matching part of the input. In general, patterns can be ambiguous, meaning that there are various ways of matching the input, resulting in multiple associations. When regular expression patterns are used as database queries, it is indeed common and desirable for a pattern to have many matches in the data, and to be able to retrieve all of them. However, in general-purpose programming using pattern matching as in ML, Prolog, or XDuce, we normally want unique matching and a deterministic semantics.

One approach to the latter problem would be to simply disallow ambiguity by requiring the regular expressions to be *unambiguous* [4]. Another, more programmer-friendly approach is to allow arbitrary regular expression patterns, but to employ a special *unique matching* semantics. In this paper, we investigate this last approach on strings. We present a formal definition of unique matching, and give a sound and complete algorithm for solving the associated *regular type inference problem*: given a regular expression P and a regular “context language” C , compute for each subexpression P' of P the regular language consisting of all subwords w' of an input string $w \in C$, such that w' is matched by P' when matching w uniquely to P .

Regular type inference is useful for type-checking transformations: given an input language, does the transformed document always adhere to a desired output language [5–8]? An important feature of our approach is that it directly yields an unambiguous NFA that not only contains the types of all the subexpressions of the given pattern, but also serves to perform the actual matching on any given string in linear time.

Regular expression pattern matching and its type inference problem was first studied in the context of XDuce, an XML processing language [2]. While enormously influential, it suffers from a few disadvantages. First, the XDuce type inference algorithm is incomplete. Also, the formalism used to represent regular tree languages (in terms of linear context-free grammars with encoding into binary trees) is hardwired into the algorithm, making it very syntactic in nature and hard to understand. Our aim is to abstract away from a particular syntax of regular languages. We therefore present a sound and complete algorithm using only operations on languages. As such, our algorithm is independent of a surrounding (regular expression) type system.

Another problem with the XDuce approach is the introduction of a misconception regarding unique matching of regular expression patterns. Namely, the longest match policy used to disambiguate the Kleene closure is simulated by recursion and the first match policy, which is used to disambiguate disjunctions. We will show that this simulation is incorrect.

Two recent followups on XDuce, which happened concurrently and independently with our own work, are CDuce and λ^{re} [6, 9, 10]. While both approaches claim complete type inference, they follow XDuce in simulating longest match by first match and recursion. We will show that this causes the inferred types to be incorrect with regard to the longest match policy. Another advantage of our approach is the elementary nature of our type inference method, which works purely on the language level and which yields to a reasonably simple correctness proof.

The rest of this paper is organized as follows. In Sect. 2 we formally define the matching relation based on two disambiguating rules: first match and longest match. It is shown that the above-mentioned simulation of longest match by first match and recursion is incorrect. In Sect. 3 we introduce the type inference problem and give a declarative way of solving it. A concrete implementation strategy is given in Sect. 4, where we also show that this strategy leads to an efficient implementation of the matching process. The last section touches on some future work.

2 Unique Pattern Matching

Matching against regular expression patterns is done in two parts: (1) making sure that the input word belongs to the language of the expression; and, (2) associating with every subexpression the matching subword. These associations can then be used to extract relevant data from the matched string. However, regular expressions can be ambiguous [4]. For instance, when we want to show that aa is matched by $a^* \cdot (a + \varepsilon)$, should we associate aa to a^* and λ to $(a + \varepsilon)$ or should we associate a to a^* and a to $(a + \varepsilon)$?¹ And what if we consider a being matched by $a + a$, should we associate a with the first a or the second? Furthermore, how should we deal with the matching of aab by $(a + b + a \cdot b)^*$? In order to get a unique matching strategy, we define the $*$ -operator to be “greedy”, meaning it should match the longest possible subword still allowing the rest of the pattern to match. This is referred to as the *longest match* semantics in Perl, XDuce, CDuce and λ^{re} . Furthermore, for patterns like $P_1 + P_2$, we opt for the *first match* policy where we only associate the subword with P_2 if it cannot be matched by P_1 . Finally, we treat P^* as being atomic, in the sense that we do not give associations for subexpressions of P . In this section, we give formal definitions of patterns and the matching process and show that the proposed policies guarantee a unique matching strategy.

We assume to be given a fixed, finite alphabet Σ which does not contain the special symbols $\perp$ and $\square$. Elements of Σ will be denoted with σ and words over Σ will be denoted with w throughout the rest of this paper. A *regular expression pattern* P is a regular expression over Σ . That is, P is either of the form σ with $\sigma \in \Sigma$, $P_1 + P_2$, $P_1 \cdot P_2$ or P_1^* , where P_1 and P_2 are already regular expression patterns. We define all operators to be right-associative. The set of

¹ To avoid confusion we denote the empty word with λ and the regular expression recognizing λ with ε .

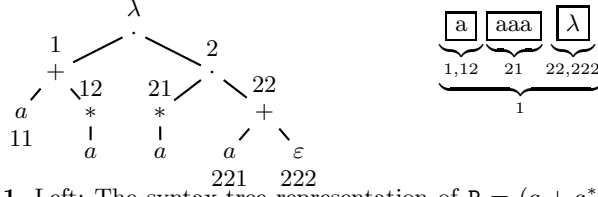


Fig. 1. Left: The syntax-tree representation of $P = (a + a^*) \cdot a^* \cdot (a + \varepsilon)$. The bindable nodes have their addresses annotated. Right: The associations resulting from the matching of P against $aaaa$. Nodes that are not mentioned are associated with $\perp$.

all patterns is denoted by $\mathcal{P}$. Because we will consider the abstract syntax tree of a pattern, we abuse notation slightly and identify P with the partial function $P : \{1, 2\}^* \rightarrow \{*, \cdot, +, \varepsilon\} \cup \Sigma$ such that

- if $P = \varepsilon$ then $\text{dom}(P) = \{\lambda\}$ and $P(\lambda) = \varepsilon$,
- if $P = \sigma$ with $\sigma \in \Sigma$ then $\text{dom}(P) = \{\lambda\}$ and $P(\lambda) = \sigma$,
- if $P = P_1 + P_2$ then $\text{dom}(P) = \{\lambda\} \cup \{1n \mid n \in \text{dom}(P_1)\} \cup \{2n \mid n \in \text{dom}(P_2)\}$ with $P(\lambda) = +$, $P(1n) = P_1(n)$ and $P(2n) = P_2(n)$,
- if $P = P_1 \cdot P_2$ we make a similar definition, only $P(\lambda) = \cdot$, and
- if $P = P_1^*$ then $\text{dom}(P) = \{\lambda\} \cup \{1n \mid n \in \text{dom}(P_1)\}$, $P(\lambda) = *$ and $P(1n) = P_1(n)$.

Intuitively the function view of a pattern describes the abstract syntax tree of its regular expression, as shown in Fig. 1. Elements of $\{1, 2\}^*$ are called *nodes* and will be denoted by n , m and their subscripted versions. We say that node n is an ancestor of m if there is some $n' \neq \lambda$ for which $m = nn'$. If $m = n1$ ($m = n2$) then m is the left (right) child of n . A node $n \in \text{dom}(P)$ is a *bindable node* of P if it does not have an ancestor labeled with $*$. The set of bindable nodes of P is denoted with $\text{bn}(P)$. We define the size $|P|$ of P as the cardinality of its domain.

The matching process is formally described by the matching relation $w \in P \rightsquigarrow V$, signifying that w is matched by P yielding associations V . Here, V is a function from $\text{bn}(P)$ to subwords of w or to the special symbol $\perp$. Intuitively, $V(n) = w'$ if the pattern rooted at node n is responsible for matching the subword w' . It is $\perp$ if the subpattern is not responsible for recognizing any subword of w . To simplify the definition of the matching relation we introduce some notation. If V_1 and V_2 are such functions, then we use $V_1 + P_2$ to denote the function for which $(V_1 + P_2)(\lambda) = V_1(\lambda)$, $(V_1 + P_2)(1n) = V_1(n)$ for every $n \in \text{dom}(V_1)$ and $(V_1 + P_2)(2n) = \perp$ for every $n \in \text{bn}(P_2)$. We define $P_1 + V_2$ similarly. Moreover, $V_1 \cdot V_2$ is the function such that $(V_1 \cdot V_2)(\lambda) = V_1(\lambda) \cdot V_2(\lambda)$ if $V_1(\lambda) \neq \perp$ and $V_2(\lambda) \neq \perp$, and it is $\perp$ otherwise. Furthermore, $(V_1 \cdot V_2)(1n) = V_1(n)$ for every $n \in \text{dom}(V_1)$ and $(V_1 \cdot V_2)(2n) = V_2(n)$ for every $n \in \text{dom}(V_2)$.

The inference rules for $w \in P \rightsquigarrow V$ are given in Fig. 2. We write $w \in P$ if $w \in P \rightsquigarrow V$ holds for some V and $w \notin P$ otherwise. The auxiliary relation $(w_1, w_2) \in P_1 \cdot P_2 \rightsquigarrow (V_1, V_2)$ is used to indicate that when matching $w_1 w_2$ by $P_1 \cdot P_2$, pattern P_1 is responsible for matching w_1 , yielding associations V_1 , while P_2

$$\begin{array}{c}
\text{EMPTY} \\
\lambda \in \varepsilon \rightsquigarrow [\lambda \rightarrow \lambda] \\
\\
\text{KLEENE CLOSURE} \\
\frac{w_1 \in P \rightsquigarrow V_1 \quad w_2 \in P^* \rightsquigarrow V_2 \quad w_1 \neq \lambda}{w_1 w_2 \in P^* \rightsquigarrow [\lambda \rightarrow w_1 w_2]} \\
\\
\text{OR2} \\
\frac{w \in P_2 \rightsquigarrow V \quad w \not\in P_1}{w \in P_1 + P_2 \rightsquigarrow P_1 + V} \\
\\
\text{CELEM} \\
\frac{(w_1, w_2) \in P_1 \cdot P_2 \rightsquigarrow (V_1, V_2)}{w_1 w_2 \in P_1 \cdot P_2 \rightsquigarrow V_1 \cdot V_2} \\
\\
\text{CLAB} \\
\frac{\sigma \in \sigma \rightsquigarrow V_1 \quad w \in P \rightsquigarrow V_2}{(\sigma, w) \in \sigma \cdot P \rightsquigarrow (V_1, V_2)} \\
\\
\text{COR2} \\
\frac{(w_1, w_2) \in P_2 \cdot P_3 \rightsquigarrow (V_1, V_2) \quad w_1 w_2 \not\in P_1 \cdot P_3}{(w_1, w_2) \in (P_1 + P_2) \cdot P_3 \rightsquigarrow (P_1 + V_1, V_2)} \\
\\
\text{CKLEENE} \\
\frac{\neg(\exists w_3 \neq \lambda, w_4 : w_2 = w_3 w_4 \wedge w_1 w_3 \in P_1^* \wedge w_4 \in P_2) \quad w_1 \in P_1^* \rightsquigarrow V_1 \quad w_2 \in P_2 \rightsquigarrow V_2}{(w_1, w_2) \in P_1^* \cdot P_2 \rightsquigarrow (V_1, V_2)} \\
\\
\text{LAB} \\
\sigma \in \sigma \rightsquigarrow [\lambda \rightarrow \sigma] \\
\\
\text{KLEENE EMPTY} \\
\lambda \in P^* \rightsquigarrow [\lambda \rightarrow \lambda] \\
\\
\text{OR1} \\
\frac{w \in P_1 \rightsquigarrow V}{w \in P_1 + P_2 \rightsquigarrow V + P_2} \\
\\
\text{CEMPTY} \\
\frac{w \in P \rightsquigarrow V_2}{(\lambda, w) \in \varepsilon \cdot P \rightsquigarrow ([\lambda \rightarrow \lambda], V_2)} \\
\\
\text{COR1} \\
\frac{(w_1, w_2) \in P_1 \cdot P_3 \rightsquigarrow (V_1, V_2)}{(w_1, w_2) \in (P_1 + P_2) \cdot P_3 \rightsquigarrow (V_1 + P_2, V_2)} \\
\\
\text{CCON} \\
\frac{(w_1, w_2 w_3) \in P_1 \cdot (P_2 \cdot P_3) \rightsquigarrow (V_1, W) \quad (w_2, w_3) \in P_2 \cdot P_3 \rightsquigarrow (V_2, V_3)}{(w_1 w_2, w_3) \in (P_1 \cdot P_2) \cdot P_3 \rightsquigarrow (V_1 \cdot V_2, V_3)}
\end{array}$$

Fig. 2. The matching relation

is responsible for matching w_2 , yielding associations V_2 . The first match policy is implemented in rules Or2 and COr2 where we do not allow to examine the second branch of a disjunction until the first one fails to match. The longest match policy is expressed in rule CKleene. Figure 1 shows the associations obtained by matching $(a + a^*) \cdot a^* \cdot (a + \varepsilon)$ against $aaaa$.

The *language* $L(P)$ of a pattern P is defined as the language of its regular expression. We can then obtain the following theorem:

Theorem 1. *The matching relation of Fig. 2 is well defined:*

1. *The matching relation is semantically correct: $w \in P \rightsquigarrow V$ iff $w \in L(P)$, and,*
2. *The matching relation is unique: if $w \in P \rightsquigarrow V$ and $w \in P \rightsquigarrow W$ then $V = W$.*

Proof (Sketch). The “if” part of (1) can be proved by induction on the matching derivation. To prove the other way around, we first define the relation $\sqsubseteq \subseteq \mathcal{P} \times \mathcal{P}$ where $\sqsubseteq$ relates a pattern with its immediate sub-patterns if $P \neq (P_1 \cdot P_2) \cdot P_3$ and $P \neq (P_1 + P_2) \cdot P_3$. We define $\sqsubseteq$ to relate $(P_1 \cdot P_2) \cdot P_3$ with $P_2 \cdot P_3$ and with $P_1 \cdot (P_2 \cdot P_3)$ and to relate $(P_1 + P_2) \cdot P_3$ with $P_1 \cdot P_3$ and with $P_2 \cdot P_3$. The monotone embedding ϕ into $\mathbb{N} \times \mathbb{N}$ where $\phi(P) = (|P|, 0)$ if $P \neq P_1 \cdot P_2$ and $\phi(P_1 \cdot P_2) = (|P_1 \cdot P_2|, |P_1|)$ otherwise, shows that $\sqsubseteq$ is a well-founded ordering on $\mathcal{P}$. The proof then goes by well-founded induction on $(\mathcal{P}, \sqsubseteq)$. Statement (2) is proved by induction on both matching derivations. $\square$

In related work [2, 3, 6, 9], the longest match policy is simulated by the first match policy and recursion. We will now show that this simulation is incor-

rect. Concretely, consider the inference rule CKleene' for Kleene Closure in a concatenation from λ^{re} (XDuce and CDuce use equivalent rules).

$$\frac{\text{CKLEENE}' \quad (w_1, w_2) \in ((P_1 \cdot P_1^*) + \varepsilon) \cdot P_2 \rightsquigarrow (V_1, V_2)}{(w_1, w_2) \in P_1^* \cdot P_2 \rightsquigarrow (V_1, V_2)}$$

Here, we assume w.l.o.g. $\lambda \notin P_1$. The proposed intuition behind this rule is that, when trying to derive $w \in P_1^* \cdot P_2 \rightsquigarrow V$, we will be forced by the first match policy to consider $(P_1 \cdot P_1^*) \cdot P_2$ before $\varepsilon \cdot P_2$ at every expansion of $P_1^* \cdot P_2$. Since $\lambda \notin P_1$, this should require us to split w into $w_1 \in P_1^*$ and $w_2 \in P_2$ such that w_2 is the smallest suffix of w still matched by P_2 . However, this is a false intuition. Indeed, because the first match strategy continues to be used in P_1 , it is possible that P_2 is allowed to start matching before a longer matching alternative in P_1 is considered. For example, consider the matching of ab against $P = (a + a \cdot b)^* \cdot (b + \varepsilon)$. By the longest match policy, we would expect $(a + a \cdot b)^*$ to be associated with ab . Indeed, this is the unique association derived by our rules of Fig. 2. Rule CKleene', however, will incorrectly derive the association of a to $(a + a \cdot b)^*$ and b to $(b + \varepsilon)$, as we show next.

$$\frac{\frac{\frac{(a, b) \in (a + a \cdot b) \cdot ((a + a \cdot b)^* \cdot (b + \varepsilon)) \rightsquigarrow (V_1', W)}{(\lambda, b) \in ((a + a \cdot b)^* \cdot (b + \varepsilon)) \rightsquigarrow (V_2', V_2)} \text{CCON}}{(a, b) \in ((a + a \cdot b) \cdot (a + a \cdot b)^* \cdot (b + \varepsilon)) \rightsquigarrow (V_1 = V_1' \cdot V_2', V_2)} \text{COR1}}{\frac{(a, b) \in (((a + a \cdot b) \cdot (a + a \cdot b)^* + \varepsilon) \cdot (b + \varepsilon)) \rightsquigarrow (V_1, V_2)}{(a, b) \in (a + a \cdot b)^* \cdot (b + \varepsilon) \rightsquigarrow (V_1, V_2)} \text{CKLEENE}'}}{ab \in P \rightsquigarrow V_1 \cdot V_2} \text{CELEM}$$

The derivation for the first subgoal $(a, b) \in (a + a \cdot b) \cdot ((a + a \cdot b)^* \cdot (b + \varepsilon)) \rightsquigarrow (V_1', W)$ must look like

$$\frac{\frac{\frac{a \in a \rightsquigarrow V_1'' = [\lambda \rightarrow a]}{b \in (a + a \cdot b)^* \cdot (b + \varepsilon) \rightsquigarrow W} \text{CELEM}}{(a, b) \in a \cdot ((a + a \cdot b)^* \cdot (b + \varepsilon)) \rightsquigarrow (V_1', W)} \text{CLAB}}{(a, b) \in (a + a \cdot b) \cdot ((a + a \cdot b)^* \cdot (b + \varepsilon)) \rightsquigarrow (V_1' = V_1'' + (a \cdot b), W)} \text{COR1}$$

Here, the subderivation indicated by the dots above the use of CElem is isomorphic to the derivation for the second subgoal $(\lambda, b) \in (a + ab)^* \cdot (b + \varepsilon) \rightsquigarrow (V_2', V_2)$:

$$\frac{\frac{\frac{b \in b \rightsquigarrow V_2 = [\lambda \rightarrow b]}{b \in (b + \varepsilon) \rightsquigarrow V_2} \text{LAB}}{(a, b) \in \varepsilon \cdot (b + \varepsilon) \rightsquigarrow (V_2' = [\lambda \rightarrow \lambda], V_2)} \text{OR1}}{\frac{(a, b) \in (((a + a \cdot b) \cdot (a + a \cdot b)^* + \varepsilon) \cdot (b + \varepsilon)) \rightsquigarrow (V_2', V_2)}{(\lambda, b) \in (a + a \cdot b)^* \cdot (b + \varepsilon) \rightsquigarrow (V_2', V_2)} \text{COR2}}{\text{CKLEENE}'}$$

Now $(V_1 \cdot V_2)(1) = a$ and $(V_1 \cdot V_2)(2) = b$, as we wanted to show.

3 Type Inference

The matching process described in the previous section is used in many practical languages (including Perl) where the associations are used to construct the output. Recently, there has been growing interest to add *type safety* to such languages: given an input language, the transformation should always produce outputs adhering to a certain output language [5–7]. In one approach to achieving this, one has to infer for every subexpression in the pattern the set of words it is capable of matching. In this section we present an algorithm for this type inference problem. We also note that the existing type inference algorithms are incorrect with regard to the longest match policy; this will follow from the incorrect simulation of longest match by recursion and first match, as shown in the previous section.

Let C be a set of words called the *context*. The *type* of a bindable node n in P relative to C , denoted as $\mathcal{T}(n, P, C)$ is the set of words w for which there exists some $w' \in C$ such that $w' \in P \rightsquigarrow V$ and $V(n) = w$. The main result of this paper can be stated as follows:

Theorem 2. *If C is a regular language then $\mathcal{T}(n, P, C)$ is also regular, and can be effectively computed.*

The algorithm is obtained by structural induction on the pattern, applying the equalities we introduce in the following lemmas and propositions.² For instance, the next lemma shows how to calculate $\mathcal{T}(\lambda, P, C)$:

Lemma 1. $\mathcal{T}(\lambda, P, C) = L(P) \cap C$ for any pattern P .

Proof. By a simple induction on the matching derivation we can prove that if $w \in P \rightsquigarrow V$ then $V(\lambda) = w$ and if $(w_1, w_2) \in P_1 \cdot P_2 \rightsquigarrow (V_1, V_2)$ then $V_1(\lambda) = w_1$ and $V_2(\lambda) = w_2$. Combining this observation with Theorem 1 gives the desired result almost immediately. $\square$

Note that this result completely solves the type inference problem when P equals ε , σ or P_1^* , since $\text{bn}(P) = \{\lambda\}$ in these cases. When P is of a different form, we will calculate $\mathcal{T}(n, P, C)$ from $\mathcal{T}(n', P', C')$ for some simpler pattern P' and possibly different context C' . In the case where $P = (P_1 \cdot P_2) \cdot P_3$ we will need the set $M(n, P, C) = \{w_1 \square w_2 \mid \exists w' \in C, w' \in P \rightsquigarrow V, V(n1) = w_1, V(n2) = w_2\}$ to be defined on all bindable nodes of P which are labeled with a concatenation. We will also show how to calculate this set. Intuitively, the symbol $\square$ specifies how $w_1 w_2$ is “broken up” into subwords when it is matched by the concatenation at node n .

The case where $P = P_1 + P_2$ is handled by the following proposition:

Proposition 1. *For $P = P_1 + P_2$, the following equalities hold:*

$$1. \mathcal{T}(\lambda, P, C) = \mathcal{T}(\lambda, P_1, C) \cup \mathcal{T}(\lambda, P_2, C - L(P_1))$$

² Proofs of the claims in this section are given in Appendix A.

2. $T(1n, P, C) = T(n, P_1, C)$
3. $T(2n, P, C) = T(n, P_2, C - L(P_1))$
4. $M(1n, P, C) = M(n, P_1, C)$
5. $M(2n, P, C) = M(n, P_2, C - L(P_1))$

The next two propositions handle $P = \varepsilon \cdot P_2$ and $P = \sigma \cdot P_2$. Here, the left quotient of language L by language K , defined as $\{s \mid \exists p \in K : ps \in L\}$, is denoted as $K \setminus L$. The *right quotient* of L by K , defined as $\{p \mid \exists s \in K : ps \in L\}$, is denoted as L/K . It is well-known that regular languages are closed under both quotients [11].

Proposition 2. *If $P = \varepsilon \cdot P_2$, the following equalities hold:*

1. $T(1, P, C) = T(\lambda, \varepsilon, C/L(P_2))$
2. $T(2n, P, C) = T(n, P_2, C)$
3. $M(\lambda, P, C) = T(1, P, C) \cdot \{\square\} \cdot T(2, P, C)$
4. $M(2n, P, C) = M(n, P_2, C)$

Proposition 3. *If $P = \sigma \cdot P_2$, the following equalities hold:*

1. $T(1, P, C) = T(\lambda, \sigma, C/L(P_2))$
2. $T(2n, P, C) = T(n, P_2, (L(\sigma) \setminus C))$
3. $M(\lambda, P, C) = T(1, P, C) \cdot \{\square\} \cdot T(2, P, C)$
4. $M(2n, P, C) = M(n, P_2, L(\sigma) \setminus C)$

For the case where $P = P_1^* \cdot P_2$ the situation is a bit more involved:

Proposition 4. *When $P = P_1^* \cdot P_2$ the following equalities hold:*

1. $T(1, P, C) = T_1$
2. $T(2n, P, C) = T(n, P_2, C_2)$
3. $M(\lambda, P, C) = I$
4. $M(2n, P, C) = M(n, P_2, C_2)$

Here, $T_1 = \{p \in L(P_1^*) \mid \exists s \in L(P_2) : ps \in C \wedge c\}$, $C_2 = \{s \in L(P_2) \mid \exists p \in L(P_1^*) : ps \in C \wedge c\}$ and $I = \{p\square s \mid ps \in C \wedge p \in L(P_1^*) \wedge s \in L(P_2) \wedge c\}$ with $c \equiv \neg(\exists w_3, w_4 : w_3 \neq \lambda \wedge w_3 w_4 = s \wedge p w_3 \in L(P_1^*) \wedge w_4 \in L(P_2))$.

Of course, this proposition is of little use if we cannot calculate T_1 , C_2 and I . The next lemma gives one possible way of calculating them and also shows that they are regular if C is. We denote $\Sigma \cup \{\square\}$ by $\Sigma_\square$ and let π be the homomorphism from $\Sigma_\square$ to Σ with $\pi(\sigma) = \sigma$ for every $\sigma \in \Sigma$ and $\pi(\square) = \lambda$. Clearly, if L is a regular language, so is $\pi^{-1}(L) = \{w \in \Sigma_\square^* \mid \pi(w) \in L\}$.

Lemma 2. *Using the notation of Proposition 4, and writing $L(P_1^*)$ as L_1 , $L(P_2)$ as L_2 and $\pi^{-1}(L_1) - (L_1 \cdot \{\square\})$ as A , we have:*

- $I = \pi^{-1}(C) \cap ((L_1 \cdot \{\square\}) \cdot L_2) - A \cdot L_2$,
- $T_1 = I/(\{\square\} \cdot L_2)$, and
- $C_2 = (L_1 \cdot \{\square\}) \setminus I$.

Proof. By definition, $(L_1 \cdot \{\square\} \cdot L_2) - A \cdot L_2$ equals

$$\{w_1 \square w_2 \mid w_1 \in L_1 \wedge w_2 \in L_2 \wedge \neg(\exists v_1, v_2 : v_1 v_2 = w_1 \square w_2 \wedge v_1 \in A \wedge v_2 \in L_2)\}$$

Or, more elaborately,

$$\begin{aligned} \{w_1 \square w_2 \mid w_1 \in L_1 \wedge w_2 \in L_2 \wedge \neg(\exists v_1, v_2 : v_1 v_2 = w_1 \square w_2 \\ \wedge \pi(v_1) \in L_1 \wedge (\forall p \in L_1 : v_1 \neq p \square) \wedge v_2 \in L_2)\} \end{aligned}$$

We show that this equals

$$\begin{aligned} \{w_1 \square w_2 \mid w_1 \in L_1 \wedge w_2 \in L_2 \wedge \\ \neg(\exists w_3, w_4 : w_3 \neq \lambda \wedge w_2 = w_3 w_4 \wedge \pi(w_1 \square w_3) \in L_1 \wedge w_4 \in L_2)\} \end{aligned}$$

We can see this as follows. Suppose $w_1 \square w_2$ is in the upper set and suppose that there do exist w_3 and w_4 such that $w_2 = w_3 w_4$, $w_3 \neq \lambda$, $\pi(w_1 \square w_3) \in L_1$ and $w_4 \in L_2$. Then take $v_1 = w_1 \square w_3$ and $v_2 = w_4$ to see that $w_1 \square w_2$ cannot be in the upper set, a contradiction. On the other hand, suppose $w_1 \square w_2$ is in the lower set and suppose that there do exist v_1 and v_2 such that $v_1 v_2 = w_1 \square w_2$, $\pi(v_1) \in L_1$, $\forall p \in L_1 : v_1 \neq p \square$ and $v_2 \in L_2$. Since $v_2 \in L_2$ and L_2 is a language over Σ , v_2 cannot contain the symbol $\square$. Since $v_1 v_2 = w_1 \square w_2$, v_2 must be a suffix of w_2 . Hence, we can divide w_2 in w_3 and w_4 such that $v_1 = w_1 \square w_3$ and $v_2 = w_4$. Since $v_1 \neq p \square$ for any p , w_3 must be different from λ . Moreover, we immediately have $\pi(w_1 \square w_3) = \pi(v_1) \in L_1$ and $w_4 = v_2 \in L_2$, which gives us a contradiction.

As a consequence, $\pi^{-1}(C) \cap ((L_1 \cdot \{\square\} \cdot L_2) - A \cdot L_2)$ must equal

$$\begin{aligned} \{w_1 \square w_2 \mid \pi(w_1 \square w_2) \in C \wedge w_1 \in L_1 \wedge w_2 \in L_2 \wedge \\ \neg(\exists w_3, w_4 : w_3 \neq \lambda \wedge w_3 w_4 = w_2 \wedge \pi(w_1 \square w_3) \in L_1 \wedge w_4 \in L_2)\} \end{aligned}$$

Since w_1 and w_2 do not contain $\square$, $w_1 w_2 = \pi(w_1 \square w_2) \in C$. By the same reasoning $w_1 w_3 = \pi(w_1 \square w_3) \in L_1$. Hence, $\pi^{-1}(C) \cap ((L_1 \cdot \{\square\} \cdot L_2) - A \cdot L_2) = I$, as desired. With c as in Proposition 4 we obtain the other two desired equalities:

$$\begin{aligned} I/(\{\square\} \cdot L_2) &= \{p \mid \exists s \in L_2 : p \square s \in I\} = \{p \mid \exists s \in L_2 : ps \in C \wedge p \in L_1 \wedge c\} = T_1 \\ (L_1 \cdot \{\square\}) \setminus I &= \{s \mid \exists p \in L_1 : p \square s \in I\} = \{s \mid \exists p \in L_1 : ps \in C \wedge s \in L_2 \wedge c\} = C_2 \end{aligned}$$

□

The case $P = (P_1 \cdot P_2) \cdot P_3$ is handled as follows:

Proposition 5. *If $P = (P_1 \cdot P_2) \cdot P_3$ and $P' = P_1 \cdot (P_2 \cdot P_3)$, the following equalities hold:*

1. $T(11n, P, C) = T(1n, P', C)$
2. $T(12n, P, C) = T(21n, P', C)$
3. $T(2n, P, C) = T(22n, P', C)$
4. $M(2n, P, C) = M(22n, P', C)$

5. $M(11n, P, C) = M(1n, P', C)$
6. $M(12n, P, C) = M(21n, P', C)$
7. $M(\lambda, P, C) = \{w_1 w_2 \square \cdot w_3 \mid w_1 \square w_2 \square w_3 \in J\}$
8. $M(1, P, C) = J/(\{\square\} \cdot \Sigma^*)$
9. $T(1, P, C) = \pi(M(1, P, C))$

Where $J = \{w_1 \square w_2 \square w_3 \mid w_1 \square w_2 w_3 \in M(\lambda, P', C), w_2 \square w_3 \in M(2, P', C)\}$

We note that J is regular if $M(\lambda, P', C)$ and $M(2, P', C)$ are. Indeed, to recognize a word in J we simply start the automaton for $M(\lambda, P', C)$. When we read the first $\square$ we also start the automaton for $M(2, P', C)$, running both automata in parallel, and modify the transition relation of $M(\lambda, P', C)$ to allow an extra $\square$ to be read. We accept if both automata are in a final state.

Finally, we treat $(P_1 + P_2) \cdot P_3$:

Proposition 6. *If $P = (P_1 + P_2) \cdot P_3$ and $P' = P_1 \cdot P_3 + P_2 \cdot P_3$ the following equalities hold:*

1. $T(1, P, C) = T(11, P', C) \cup T(21, P', C)$
2. $T(11, P, C) = T(11, P', C)$
3. $T(12, P, C) = T(21, P', C)$
4. $T(2, P, C) = T(12, P', C) \cup T(12, P', C)$
5. $M(\lambda, P, C) = M(1, P', C) \cup M(2, P', C)$
6. $M(11n, P, C) = M(11n, P', C)$
7. $M(12n, P, C) = M(21n, P', C)$
8. $M(2n, P, C) = M(12n, P', C) \cup M(22n, P', C)$

The type inference algorithm announced in Theorem 2 now works as follows if C is regular. For the base cases ε , σ and P^* , Lemma 1 allows us to calculate every type, which must be regular. For the other cases, the propositions above dictate how to calculate the types by recursion, using only regular operations on regular sets. The algorithm can be seen to use the well-founded $\sqsupset$ -ordering on patterns introduced in the proof of Theorem 1 in its recursion, from which its termination follows. However, the observant reader will note that the last proposition relates $(P_1 + P_2) \cdot P_3$ with the $\sqsupset$ -incomparable $P_1 \cdot P_3 + P_2 \cdot P_3$. Termination still follows if we modify the algorithm to combine the results of Proposition 6 with the ones of Proposition 1 to calculate the type of $(P_1 + P_2) \cdot P_3$ by recursion on $P_1 \cdot P_3$ and $P_2 \cdot P_3$.

Related work [6, 9, 10] claimed sound and complete type inference algorithms for the matching relation with rule CKleene' described at the end of the previous section. Using the same counterexample pattern $P = (a + a \cdot b)^* \cdot (b + \varepsilon)$ and string ab , these algorithms must compute $T(1, P, \{ab\}) = \{a\}$ and $T(2, P, \{ab\}) = \{b\}$. In contrast, our algorithm correctly computes $T(1, P, \{ab\}) = \{ab\}$ and $T(2, P, \{ab\}) = \{\lambda\}$ in accordance with the longest match policy.

4 Unifying Type Inference and Matching

The process of matching w by P (and computing the resulting associations) can naively be implemented by evaluating the matching relation of Fig. 2 in a

syntax-directed manner. This approach, however, is inefficient. When we want to match w by $P_1^* \cdot P_2$, we have to create subdivisions of w into w_1 and w_2 satisfying the premises of rule CKleene. Since there are $|w|$ possible divisions, and since checking the premises for a possible division requires us to match w_1 by P_1^* and w_2 by P_2 , every letter of w is scanned at least $|w|$ times in the worst case scenario, giving $\Omega(|w|^2)$ time complexity. We will now show how the type inference algorithm of the previous section can be used to compile a pattern P into an NFA that will allow us to execute the matching process in $O(|w|)$ time. As a bonus, the computed NFA contains the inferred type of every node in P . The NFA can be at least exponentially larger than P , but this is not abnormal; indeed, the same happens in ML when the input is only allowed to be investigated once [12, 13].

A *non-deterministic finite automaton* (NFA) A is a tuple $(Q_A, I_A, F_A, \delta_A)$ where Q_A is a set of states, $I_A \subseteq Q_A$ is the set of initial states, $F_A \subseteq Q_A$ is the set of final states and $\delta : Q_A \times \Sigma \cup \{\lambda\} \times Q_A$ is the transition relation. An accepting run of A on $w = \sigma_1 \dots \sigma_n$ is a sequence $(q_0, k_0), \dots, (q_m, k_m)$ where $k_0 = 0$, $q_0 \in I_A$, $k_m = n$, $q_m \in F_A$ and for every i either $\delta_A(q_i, \sigma_{k_{i+1}}, q_{i+1})$ with $k_{i+1} = k_i + 1$ or $\delta_A(q_i, \lambda, q_{i+1})$ with $k_{i+1} = k_i$ and $q_i \neq q_{i+1}$. The language of A is the set of words for which an accepting run exists and will be denoted by $L(A)$. A NFA is deterministic (a DFA) if I_A is a singleton set, for every q and σ there exists exactly one q' for which $\delta(q, \sigma, q')$, and $\delta(q, \lambda, q')$ iff $q = q'$. If $S \subseteq Q_A$ and $\tau = (q_1, k_1), \dots, (q_m, k_m)$ is a run of A on some word w , then $\text{pos}(\tau, S) = \{k_i \mid q_i \in S\}$. If $\text{pos}(\tau, S) \neq \emptyset$ then $\tau|_S$ is the couple (i, j) for which $i = \min(\text{pos}(\tau, S))$ and $j = \max(\text{pos}(\tau, S))$. It is $(-1, -1)$ otherwise. The subword of $w = \sigma_1 \dots \sigma_n$ bounded by (i, j) , denoted as $w_{(i,j)}$ is $\sigma_{i+1} \dots \sigma_j$ if $0 \leq i \leq j \leq n$ and $\perp$ otherwise.

If A_1 and A_2 are NFA's, we write $A_1 \cdot A_2$ for the automaton recognizing $L(A_1) \cdot L(A_2)$ obtained by connecting the final states of A_1 to the initial states of A_2 by λ -transitions. We write $A_1 \cup A_2$ for the automaton recognizing $L(A_1) \cup L(A_2)$ obtained by taking the tuple-wise union of A_1 and A_2 , and we write $A_1 \cap A_2$ for the automaton recognizing $L(A_1) \cap L(A_2)$, obtained by the product construction. In particular, $A_1 \cap A_2$ has $Q_{A_1} \times Q_{A_2}$ as the set of states. We denote the minimal DFA recognizing $\{\square\}$ as $A_\square$ and let $\pi(A)$ be the automaton where we transform every $\square$ -transition of A into a λ -transition.

Algorithm 1 computes (recursively) the *hyperautomaton* $H(P, C) = (A, f)$ for pattern P and context C . Here A is an NFA and f is a function relating bindable nodes n of P to triples (Q_n, I_n, F_n) , where Q_n , I_n and F_n are all subsets of Q_A . We use $(Q_1, I_1, F_1) \times Q_2$ to denote $(Q_1 \times Q_2, I_1 \times Q_2, F_1 \times Q_2)$ and $(Q_1, I_1, F_1) \cup (Q_2, I_2, F_2)$ to denote $(Q_1 \cup Q_2, I_1 \cup I_2, F_1 \cup F_2)$. We now state:

Theorem 3. *The hyperautomaton (A, f) computed by Algorithm 1 has the following properties, where $f(n) = (Q_n, I_n, F_n)$:*

1. $L(Q_n, I_n, F_n, \delta_A) = T(n, P, C)$
2. *The automaton A is unambiguous: for every w there is at most one accepting run of A on w .*

Algorithm 1 Calculate the hyperautomaton $H(P, C)$.

```

1: if  $P = \varepsilon$ ,  $P = \sigma$  or  $P = P_1^*$  then
2:   compute a DFA  $A$ , recognizing  $L(P) \cap C$ 
3:   return  $(A, f)$  with  $f(\lambda) = (Q_A, I_A, F_A)$ 
4: else if  $P = P_1 + P_2$  then
5:   compute  $(A_1, f_1) = H(P_1, C)$  and  $(A_2, f_2) = H(P_2, C - L(P_1))$ 
6:   let  $A = A_1 \cup A_2$ 
7:   return  $(A, f)$  with  $f(\lambda) = (Q_A, I_A, F_A)$ ,  $f(1n) = f_1(n)$  and  $f(2n) = f_2(n)$ 
8: else if  $P = P_1 \cdot P_2$  with  $P_1 = \varepsilon$  or  $P_1 = \sigma$  then
9:   compute  $(A_1, f_1) = H(P_1, C/L(P_2))$  and  $(A_2, f_2) = H(P_2, L(P_1) \setminus C)$ 
10:  let  $A = A_1 \cdot A_2$ 
11:  return  $(A, f)$  with  $f(\lambda) = (Q_A, I_A, F_A)$ ,  $f(1n) = f_1(n)$  and  $f(2n) = f_2(n)$ 
12: else if  $P = P_1^* \cdot P_2$  then
13:  compute DFA's  $A_I$  and  $A_{T_1}$  for  $I$  and  $T_1$  as defined in Proposition 4
14:  compute  $(A_2, f_2) = H(P_2, C_2)$  with  $C_2$  as in Proposition 4
15:  let  $A = \pi((A_{T_1} \cdot A_{\square} \cdot A_2) \cap A_I)$ 
16:  return  $(A, f)$  where  $f(\lambda) = (Q_A, I_A, F_A)$ ,  $f(1) = (Q_{T_1}, I_{T_1}, F_{T_1}) \times Q_{A_I}$  and
     $f(2n) = f_2(n) \times Q_{A_I}$ 
17: else if  $P = (P_1 \cdot P_2) \cdot P_3$  then
18:  compute  $(A', f') = H(P_1 \cdot (P_2 \cdot P_3), C)$  and let  $f'(n) = (Q'_n, I'_n, F'_n)$ .
19:  let  $Q_1 = Q'_1 \cup Q'_{21}$ ,  $I_1 = (Q'_1 \cup Q'_{21}) \cap I_{A'}$  and  $F_1 = \{q \in F'_{21} \mid \exists q' \in I'_{22} : \text{there is}$ 
     $\text{a } \lambda\text{-labeled path from } q \text{ to } q' \text{ and there is a path from } q' \text{ to some state in } F_{A'}\}$ 
20:  return  $(A', f)$  where  $f(\lambda) = f'(\lambda)$ ,  $f(2n) = f'(22n)$ ,  $f(11n) = f'(1n)$ ,  $f(12n) =$ 
 $f'(21n)$  and  $f(1) = (Q_1, I_1, F_1)$ 
21: else if  $P = (P_1 + P_2) \cdot P_3$  then
22:  compute  $(A', f') = H(P_1 \cdot P_3 + P_2 \cdot P_3, C)$ 
23:  return  $(A, f)$  where  $f(\lambda) = f'(\lambda)$ ,  $f(11) = f'(11)$ ,  $f(12) = f'(21)$ ,  $f(1) =$ 
 $f'(11) \cup f'(21)$  and  $f(2) = f'(12) \cup f'(22)$ 
24: end if

```

3. For every w : $w \in C$ and $w \in P \rightsquigarrow V$ holds iff there exists an accepting run τ of A on w and $V(n) = w_{\tau|_{Q_n}}$ for every $n \in \text{bn}(P)$

The proof is in Appendix B. Part (3) allows us to derive the associations efficiently if we are given the accepting run τ on $w = \sigma_1 \dots \sigma_l$. The problem is that we are not given this run, but need to compute it. How can we best determine $V(n)$ in that case? We first compute the sets of states $S_0, \dots, S_l$ where $S_0 = I_A$ and $S_{i+1} = \hat{\delta}_A(S_i, \sigma_{i+1})$. Here $\hat{\delta}_A(S, \sigma)$ is defined to be the set of states that we can reach from a state in S through a path labeled with σ . If $S_l \cap F_A \neq \emptyset$ then w is matched by P . We can then compute $S'_0, \dots, S'_n$ with $S'_n = S_l \cap F_A$ and $S'_{i-1} = \hat{\delta}_A^{-1}(S'_i, \sigma_i) \cap S_{i-1}$ where $\hat{\delta}_A^{-1}(S', \sigma) = S$ if $\hat{\delta}_A(S, \sigma) = S'$. Intuitively, S'_i contains those states that can be reached from a start state with a path spelling $\sigma_1 \dots \sigma_i$ and from which we can reach a state in F_A through a path spelling $\sigma_{i+1} \dots \sigma_l$. Note that we must be able to order the states of S'_i into a sequence $q_1, \dots, q_k$ such that $\delta(q_j, \lambda, q_{j+1})$ or we can construct multiple accepting runs, contradicting (2). In particular, if $q_1^i, \dots, q_{k_i}^i$ is the ordering for S'_i , then $\tau = (q_1^0, 0), \dots, (q_{k_1}^0, 0), (q_1^1, 1), \dots, (q_{k_1}^1, 1), \dots, (q_1^l, l), \dots, (q_{k_l}^l, l)$ must be

the accepting run. Clearly, $\tau|_{Q_n} = (i, j)$ iff $S'_i \cap Q_n \neq \emptyset$, $S'_j \cap Q_n \neq \emptyset$ and there is no $m < i$ or $m > j$ for which $S'_m \cap Q_n \neq \emptyset$. So, it suffices to search the first and last i for which $S'_i \cap Q_n \neq \emptyset$ to obtain $\tau|_{Q_n}$, which gives $V(n)$ by (3). Since A is constant, all the calculations can be done in $O(|w|)$ time, which gives us an efficient matching implementation.

5 Future Work

We note that Perl has two ways of disambiguating the Kleene closure in a concatenation. One of them is the longest match strategy presented here, making the $*$ -operator “greedy”. Another version of the $*$ -operator, denoted $*?$ in Perl, has a *shortest match* semantics. That is, it will match the smallest prefix that still allows the rest of the word to be matched. The matching relation and the type inference algorithm can be expanded in a straight-forward manner to include this operator.

Although there has been extensive research on the regular type inference problem, there has not yet been a formal investigation of the inherent time complexity bounds. While we conjecture that our algorithm executes in 2EXPTIME, a formal proof still has to be given. As we noted in the previous section, the construction of $H(P, C)$ can involve an exponential blowup. A tight upper bound (single-exponential, double-exponential or more) still has to be found.

The true power of regular expression pattern matching emerges when we introduce tree patterns matching unranked hedges, in the context of XML. We are currently trying to expand the matching relation and type inference algorithm to this end. It will be interesting to see if we can also unify type inference and pattern matching in this setting.

Acknowledgments I thank Jan Van den Bussche, Dirk Leinders, Wim Martens and Frank Neven for inspiring discussions and for their comments on a draft version of this paper.

References

1. Wall, L., Christiansen, T., Orwant, J.: Programming Perl. 3rd edn. O'Reilly & Associates (2000)
2. Hosoya, H., Pierce, B.C.: Regular expression pattern matching for XML. In: Proceedings of the 28th ACM SIGPLAN-SIGACT symposium on Principles of Programming Languages, ACM Press (2001) 67–80 Full version to appear in the Journal of Functional Programming.
3. Hosoya, H.: Regular Expression Types for XML. PhD thesis, University of Tokyo (2000)
4. Book, R., Even, S., Greibach, S., Ott, G.: Ambiguity in graphs and expressions. IEEE Transactions on Computers **20** (1971) 149–153
5. Suciu, D.: The XML typechecking problem. ACM SIGMOD Record **31** (2002) 89–96

6. Tabuchi, N., Sumii, E., Yonezawa, A.: Regular expression types for strings in a text processing language (extended abstract). In: Workshop on Types in Programming (TIP'02). (2002) <http://web.yl.is.s.u-tokyo.ac.jp/~tabee/xperl/>.
7. Hosoya, H., Pierce, B.C.: XDuce: A typed XML processing language. In: International Workshop on the Web and Databases (WebDB). (2000) Full version to appear in ACM Transactions on Internet Technology.
8. Hosoya, H., Vouillon, J., Pierce, B.C.: Regular expression types for XML. In: Proceedings of the fifth ACM SIGPLAN International Conference on Functional Programming, ACM Press (2000) 11–22
9. Benzaken, V., Castagna, G., Frisch, A.: CDuce: a white paper. In: Workshop on Programming Language Technologies for XML (PLAN-X). (2002) <http://www.cduce.org>.
10. Frisch, A., Castagna, G., Benzaken, V.: Semantic subtyping. In: Proceedings of the Seventeenth Annual IEEE Symposium on Logic in Computer Science, IEEE Computer Society Press (2002) 137–146
11. Hopcroft, J.E., Ullman, J.D.: Introduction to Automata Theory, Languages and Computation. Addison-Wesley (1979)
12. Le Fessant, F., Maranget, L.: Optimizing pattern matching. In: Proceedings of the sixth ACM SIGPLAN International Conference on Functional Programming, ACM Press (2001) 26–37
13. Cardelli, L.: Compiling a functional language. In: Proceedings of the 1984 ACM Symposium on LISP and functional programming, ACM Press (1984) 208–217

A Proofs of claims in Sec. 3

For completeness' sake we present the proofs of the various propositions in Sec. 3.

A.1 Proof of proposition 1

Proof. If $w \in C$ with $w \in P \rightsquigarrow V$ then there are two possible matching derivations. The first one has the form

$$\frac{\frac{\dots}{w \in P_1 \rightsquigarrow V}}{w \in P_1 + P_2 \rightsquigarrow V + P_2} \text{OR1}$$

From which we immediately obtain $w \in P_1 \rightsquigarrow V$. Now $\mathcal{T}(1n, P, C) \subseteq \mathcal{T}(n, P, C)$ and $M(1n, P, C) \subseteq M(n, P_1, C)$ since $(V + P_2)(1n) = V(n)$ and since $V(1n) = \perp$ in the other derivation. On the other hand, if $w \in P_1 \rightsquigarrow V$ then we can create the matching derivation above, which means $\mathcal{T}(n, P_1, C) \subseteq \mathcal{T}(1n, P, C)$ and $M(n, P_1, C) \subseteq M(1n, P, C)$.

The second matching derivation looks like

$$\frac{\frac{\dots}{w \in P_2 \rightsquigarrow V} \quad w \notin P_1}{w \in P_1 + P_2 \rightsquigarrow P_1 + V} \text{OR2}$$

So, $w \in C - L(P_1)$ and $w \in P_2 \rightsquigarrow V$. Because $(P_1 + V)(2n) = V(n)$, we have $\mathcal{T}(2n, P, C) \subseteq \mathcal{T}(n, P, C - L(P_1))$ and $M(2n, P, C) \subseteq M(n, P_2, C - L(P_1))$. On the other hand, if $w \in C - L(P_1)$ and $w \in P_2 \rightsquigarrow V$, we can create the matching derivation above to obtain $w \in P \rightsquigarrow P_1 + V$, so $\mathcal{T}(n, P_2, C - L(P_1)) \subseteq \mathcal{T}(2n, P, C)$ and $M(n, P_2, C - L(P_1)) \subseteq M(2n, P, C - L(P_1))$.

A.2 Proof of proposition 3

Proof. Define $C_1 = C/L(P_2)$, $C_2 = L(\sigma) \setminus C$. If $w \in C$ with $w \in P \rightsquigarrow V$ then the top of the matching derivation must look like

$$\frac{\frac{\dots}{\sigma \in \sigma \rightsquigarrow V_1} \quad \frac{\dots}{w_2 \in P_2 \rightsquigarrow V_2}}{\frac{(\sigma, w_2) \in P \rightsquigarrow (V_1, V_2)}{w = \sigma w_2 \in P \rightsquigarrow V_1 \cdot V_2}} \begin{matrix} \text{CLAB} \\ \text{CELEM} \end{matrix}$$

Since $\sigma \in C_1$ and $\sigma \in \sigma \rightsquigarrow V_1$, $\mathcal{T}(1, P, C) \subseteq \mathcal{T}(\lambda, P_1, C_1)$. If $w_1 \in \mathcal{T}(\lambda, \sigma, C_1)$, then $w_1 \in L(\sigma)$ and there must exist some $w_2 \in L(P_2)$ for which $w_1 w_2 \in C$. Then we can reconstruct the matching derivation above using theorem 1.1 and so equality (1) holds.

Since $w_2 \in C_2$ and $w_2 \in P_2 \rightsquigarrow V_2$, $\mathcal{T}(2n, P, C) \subseteq \mathcal{T}(n, P_2, C_2)$ and $M(2n, P, C) \subseteq M(n, P_2, C_2)$ hold. On the other hand, if $w_2 \in C_2$ then by definition $\sigma w_2 \in C$.

If $w_2 \in P_2 \rightsquigarrow V_2$, then we can create the matching derivation above, from which we may conclude that $\mathcal{T}(n, P_2, C_2) \subseteq \mathcal{T}(2n, P, C)$, $M(n, P_2, C_2) \subseteq M(2n, P, C)$ and $\mathcal{T}(1, P, C) \cdot \{\square\} \cdot \mathcal{T}(2, P, C) \subseteq M(\lambda, P, C)$. The inclusion

$$M(\lambda, P, C) \subseteq \mathcal{T}(1, P, C) \cdot \{\square\} \cdot \mathcal{T}(2, P, C)$$

trivially holds.

Proposition 2 can be proven in a similar way.

A.3 Proof of proposition 4

Proof. Let $w \in C$ and suppose $w \in P \rightsquigarrow V$, then the top of the matching derivation must look like

$$\frac{\frac{\dots}{w_1 \in P_1^* \rightsquigarrow V_1} \quad \frac{\dots}{w_2 \in P_2 \rightsquigarrow V_2}}{\neg(\exists w_3 \neq \lambda, w_4 : w_2 = w_3 w_4 \wedge w_1 w_3 \in P_1^* \wedge w_4 \in P_2)} \text{CKLEENE} \\ \frac{(w_1, w_2) \in P \rightsquigarrow (V_1, V_2)}{w = w_1 w_2 \in P \rightsquigarrow V_1 \cdot V_2} \text{CELEM}$$

The first equality then holds by this observation and application of Theorem 1.1. Since $w_2 \in C_2$, $\mathcal{T}(2n, P, C) \subseteq \mathcal{T}(n, P_2, C_2)$ and $M(2n, P, C) \subseteq M(n, P, C_2)$. On the other hand, if $w_2 \in C_2$, we know that $w_2 \in L(P_2)$, and there must exist some $w_1 \in L(P_1)$ with $w_1 w_2 \in C$ for which condition c holds. By application of Theorem 1.1 we can reconstruct the matching derivation shown above. As such $\mathcal{T}(n, P_2, C_2) \subseteq \mathcal{T}(2n, P, C)$ and $M(n, P_2, C_2) \subseteq M(2n, P, C)$.

If $w_1 \square w_2 \in M(\lambda, P, C)$ then, by definition, there exists some $w \in C$ such that $w \in P \rightsquigarrow V$, $V(1) = w_1$ and $V(2) = w_2$. Then, by the derivation above and Theorem 1.1 we know that $w = w_1 w_2$, $w_1 \in L(P_1^*)$ and $w_2 \in L(P_2)$. Then $w_1 \square w_2 \in I$ by applying the same theorem to the third premise of CKleene. On the other hand, if $w_1 \square w_2 \in I$, we can use the theorem again to reconstruct the matching derivation above, showing that $I \subseteq M(\lambda, P, C)$. $\square$

A.4 Proof of proposition 5

We will use the following lemma:

Lemma 3. *If $(w_1, w_2) \in P \rightsquigarrow (V_1, V_2)$ then $w_2 \in P \rightsquigarrow V_2$*

Proof. The proof goes by induction on the matching derivation $(w_1, w_2) \in P \rightsquigarrow V_1, V_2$ with a case analysis on the last rule used. In all the cases, the result either follows immediately from the premise of the last rule used, or follows immediately from the induction hypothesis. $\square$

Proof. If $w \in C$ with $w \in P \rightsquigarrow V$, then the matching derivation must look like

$$\frac{\frac{\dots}{(w_1, w_2 w_3) \in P_1 \cdot (P_2 \cdot P_3) \rightsquigarrow (V_1, W)} \quad \frac{\dots}{(w_2, w_3) \in P_2 \cdot P_3 \rightsquigarrow (V_2, V_3)}}{(w_1 w_2, w_3) \in (P_1 \cdot P_2) \cdot P_3 \rightsquigarrow (V_1 \cdot V_2, V_3)} \text{CCon} \\ \hline w = w_1 w_2 w_3 \in P_1 \cdot P_2 \rightsquigarrow (V_1 \cdot V_2) \cdot V_3 \text{CElem}$$

Using CElem on the second premise of CCon, we obtain $w_2 w_3 \in P_2 \cdot P_3 \rightsquigarrow V_2 \cdot V_3$. By lemma 3 $w_2 w_3 \in P_2 \cdot P_3 \rightsquigarrow W$, which means $W = V_2 \cdot V_3$ by Theorem 1. By using CElem on the first premise of CCon, $w \in P' \rightsquigarrow V_1 \cdot (V_2 \cdot V_3)$. If $w \in P' \rightsquigarrow V$, the derivation must look like

$$\frac{\dots}{(w_1, w_2 w_3) \in P_1 \cdot (P_2 \cdot P_3) \rightsquigarrow (V_1, W)} \text{CElem} \\ \hline w = w_1 w_2 w_3 \in P_1 \cdot (P_2 \cdot P_3) \rightsquigarrow V_1 \cdot W$$

We know by lemma 3 that $w_2 w_3 \in P_2 \cdot P_3 \rightsquigarrow W$. By the premise of CElem, that can only happen if $(w_2, w_3) \in P_2 \cdot P_3 \rightsquigarrow V_2, V_3$ for some V_2 and V_3 . But then, we can use CCon to obtain $w \in P \rightsquigarrow (V_1 \cdot V_2) \cdot V_3$.

From these observations, equalities (1) until (6) follow immediately.

Next, we will show that $J = \{w_1 \square w_2 \square w_3 \mid w_1 w_2 w_3 \in C, w_1 w_2 w_3 \in P \rightsquigarrow V, V(1) = w_1 w_2, V(11) = w_1, V(12) = w_2, V(2) = w_3\}$. Indeed, suppose $w_1 \square w_2 \square w_3 \in M(\lambda, P', C)$ and $w_2 \square w_3 \in M(2, P', C)$. This means there must exist some $w' \in C$ with $w' \in P' \rightsquigarrow V$. As explained above, $V = V_1 \cdot (V_2 \cdot V_3)$. Since $V(1) = w_1$ and $V(2) = w_2 w_3$, $w' = w_1 w_2 w_3$. Since $w_2 \square w_3 \in M(2, P', C)$, there must exist some $w'' \in C$ with $w'' \in P' \rightsquigarrow V'$, $V'(21) = w_2$ and $V'(22) = w_3$. By the observations about the matching derivation of P' made above, $w'' = w_1 w_2 w_3$ and $V' = V'_1 \cdot (V'_2 \cdot V'_3)$. Then $w_2 w_3 \in P_2 \cdot P_3 \rightsquigarrow V'_2 \cdot V'_3$ and by lemma 3 $w_2 w_3 \in P_2 \cdot P_3 \rightsquigarrow V_2 \cdot V_3$, so $V_2 \cdot V_3 = V'_2 \cdot V'_3$ by Theorem 1. Thus, $V(21) = w_2$ and $V(22) = w_3$. As such, $J = \{w_1 \square w_2 \square w_3 \mid w_1 w_2 w_3 \in C, w_1 w_2 w_3 \in P' \rightsquigarrow V, V(1) = w_1, V(21) = w_2, V(22) = w_3\}$. By the observations made above, this equals $\{w_1 \square w_2 \square w_3 \mid w_1 w_2 w_3 \in C, w_1 w_2 w_3 \in P \rightsquigarrow V, V(1) = w_1 w_2, V(11) = w_1, V(12) = w_2, V(2) = w_3\}$.

The $\supseteq$ inclusion of equalities (7) and (8) then follows immediately. Now suppose $w \in C$, $w \in P \rightsquigarrow V$ and $V(1) = w_1 w_2, V(2) = w_3$. As we can see in the matching derivation above, $w = w_1 w_2 w_3$, so $w_1 \square w_2 \square w_3 \in J$, from which we may conclude $M(\lambda, P, C) \subseteq \{w_1 w_2 \square w_3 \mid w_1 \square w_2 \square w_3 \in J\}$. If $w \in C$, $w \in P \rightsquigarrow V$ with $V(11) = w_1$ and $V(12) = w_2$, then $V(1) = w_1 w_2$ and there must exist some w_3 such that $w_1 w_2 w_3 \in C$ with $V(2) = w_3$ (see the derivation above). So, $M(1, P, C) \subseteq J/(\{\square\} \cdot \Sigma^*)$. The last equality follows directly from equality (8).

A.5 Proof of Proposition 6

Proof. If $w \in C$ and $w \in P \rightsquigarrow V$ then there are two possibilities for the top of the matching derivation:

1. Rule COr1 is used:

$$\frac{\frac{\dots}{(w_1, w_2) \in P_1 \cdot P_3 \rightsquigarrow (V_1, V_2)} \text{COR1}}{\frac{(w_1, w_2) \in (P_1 + P_2) \cdot P_3 \rightsquigarrow (V_1 + P_2, V_2)}{w = w_1 w_2 \in (P_1 + P_2) \cdot P_3 \rightsquigarrow (V_1 + P_2) \cdot V_2} \text{CELEM}}$$

So we can create the following matching derivation, proving $w \in P' \rightsquigarrow (V_1 \cdot V_2) + (P_2 \cdot P_3)$

$$\frac{\frac{\dots}{(w_1, w_2) \in P_1 \cdot P_3 \rightsquigarrow (V_1, V_2)} \text{CELEM}}{\frac{w_1 w_2 \in P_1 \cdot P_3 \rightsquigarrow V_1 \cdot V_2}{w = w_1 \cdot w_2 \in (P_1 \cdot P_3) + (P_2 \cdot P_3) \rightsquigarrow (V_1 \cdot V_2) + (P_2 \cdot P_3)} \text{OR1}}$$

On the other hand, suppose $w \in P' \rightsquigarrow V'$ for some V' , then the matching derivation could be of the same form as above. If it is we can easily construct the first matching derivation given here, so $w \in P \rightsquigarrow (V_1 + P_2) \cdot V_2$.

2. Rule COr2 is used:

$$\frac{\frac{\dots}{(w_1, w_2) \in P_2 \cdot P_3 \rightsquigarrow (V_1, V_2)} \quad w_1 w_2 \notin P_1 \cdot P_3}{\frac{(w_1, w_2) \in (P_1 + P_2) \cdot P_3 \rightsquigarrow (P_1 + V_1, V_2)}{w = w_1 w_2 \in (P_1 + P_2) \cdot P_3 \rightsquigarrow (P_1 + V_1) \cdot V_2} \text{CELEM}} \text{CCor2}$$

Then we can make the following matching derivation to show that $w \in P' \rightsquigarrow (P_1 \cdot P_3) + (V_1 \cdot V_2)$

$$\frac{\frac{\dots}{(w_1, w_2) \in P_2 \cdot P_3 \rightsquigarrow (V_1, V_2)} \quad w_1 w_2 \notin P_1 \cdot P_3}{\frac{w_1 \cdot w_2 \in P_2 \cdot P_3 \rightsquigarrow V_1 \cdot V_2}{w = w_1 \cdot w_2 \in (P_1 \cdot P_3) + (P_2 \cdot P_3) \rightsquigarrow (P_1 \cdot P_3) + (V_1 \cdot V_2)} \text{OR2}} \text{CELEM}$$

On the other hand, if $w \in P' \rightsquigarrow V'$ and we do not use Or1 at the top (which is suggested in the previous case), the matching derivation must look like the one given above. But then we can easily create the matching derivation at the beginning of this case to show that $w \in P \rightsquigarrow (P_1 + V_1) \cdot V_2$.

All equalities follow from these observations.

B Proof of theorem 3

We will prove the following, stronger theorem:

Theorem 4. *The hyperautomaton (A, f) computed by Algorithm 1 has the following properties, where $f(n) = (Q_n, I_n, F_n)$:*

1. $L(Q_n, I_n, F_n, \delta_A) = T(n, P, C)$.
2. The automaton A is unambiguous: for every w there is at most one accepting run of A on w .
3. For every w : $w \in C$ and $w \in P \rightsquigarrow V$ holds iff there exists an accepting run τ of A on w and $V(n) = w_{\tau|_{Q_n}}$ for every $n \in \text{bn}(P)$.
4. If $n \in \text{bn}(P)$, $P(n) = \cdot$, τ is an accepting run of A , $\tau|_{Q_{n1}} = (i_1, j_1)$ and $\tau|_{Q_{n2}} = (i_2, j_2)$ (both different from $(-1, -1)$), then $j_1 = i_2$ and we can find $q \in F_{n1}$ and $q' \in I_{n2}$ such that $(q, j_1), \dots, (q', i_2)$ appears in τ .

Proof. The proof goes by well-founded induction on $(\mathcal{P}, \sqsubset)$, where the $\sqsubset$ ordering on patterns was introduced in the proof of Theorem 1.

Base case We treat $P = \varepsilon$, σ or P_1^* together. Property (1) follows directly from the construction and Lemma 1. Property (2) holds trivially since the computed automaton is a DFA. Property (3) holds since λ is the only bindable node. Since there is no bindable node labeled with a concatenation, (4) trivially holds.

$P = P_1 + P_2$ If $P = P_1 + P_2$, let $(A_1, f_1) = H(P_1, C)$ and $(A_2, f_2) = H(P_2, C - L(P_1))$. For these hyperautomata, the theorem holds by induction. Property (1) follows directly from the induction hypothesis and Proposition 1 if $n \neq \lambda$. To show that the property holds for $n = \lambda$, we use lemma 1 and the induction hypothesis: $T(\lambda, P_1, C) \cup T(\lambda, P_2, C - L(P_1)) = (L(P_1) \cap C) \cup (L(P_2) \cap C - L(P_1)) = (L(P_1) \cup L(P_2)) \cap C = T(\lambda, P, C)$. Suppose that A is ambiguous, i.e. that there are two accepting runs of A on w . Then one has to be an accepting run of A_1 on w and the other an accepting run of A_2 on w (otherwise, A_1 , or A_2 would be ambiguous, which is impossible by the induction hypothesis). But then, $w \in T(\lambda, P_1, C) = L(P_1) \cap C$ and $w \in T(\lambda, P_2, C - L(P_1)) = L(P_2) \cap (C - L(P_1))$, which means $w \in L(P_1)$ and $w \notin L(P_1)$, contradiction. In the proof of Proposition 1 we remarked that $w \in P \rightsquigarrow V$ iff either $w \in P_1 \rightsquigarrow V_1$ with $V = V_1 + P_2$ or $w \in P_2 \rightsquigarrow V_2$ with $V = P_1 + V_2$ and $w \notin P_1$. Property (3) then follows directly from the induction hypothesis and the fact that the accepting run must either be an accepting run of A_1 or of A_2 . Property (4) follows directly from the induction hypothesis.

$P = \sigma \cdot P_2$ Let $(A_1, f_1) = H(\sigma, C/L(P_2))$ and $(A_2, f_2) = H(P_2, L(\sigma) \setminus C)$. Property (1) follows from the induction hypothesis and Proposition 3 if $n \neq \lambda$. It also holds for $n = \lambda$ since $T(\lambda, P, C) = \pi(M(\lambda, P, C))$ and this equals $T(\lambda, \sigma, C/L(P_2)) \cdot T(\lambda, P_2, L(\sigma) \setminus C)$ by Proposition (3).

Note that we can split any accepting run $(q_0, k_0), \dots, (q_m, k_m)$ of A on σw into an accepting run $(q_0, k_0), \dots, (q_l, k_l)$ of A_1 on σ and $(q_{l+1}, k_{l+1}), \dots, (q_m, k_m)$ of A_2 on w . If there are multiple such runs of A , we would get different runs of A_1 or A_2 , which is impossible since they are unambiguous, so Property (2) holds.

From the proof of Proposition 3 we know that $\sigma w \in P \rightsquigarrow V$ iff $\sigma \in \sigma \rightsquigarrow V_1$ and $w \in P_2 \rightsquigarrow V_2$ with $V = V_1 \cdot V_2$. Suppose $\sigma w \in C$ and $\sigma w \in P \rightsquigarrow V$. By the induction hypothesis, we have τ_1 of A_1 on σ with $V_1(\lambda) = \tau_1|_{Q_1}$ and τ_2

of A_2 on w with $V_2(n) = \tau_2|_{Q_{2n}}$. Since τ_1 cannot contain states of A_2 and τ_2 cannot contain states of A_1 , and τ_1, τ_2 is the accepting run of A , the “if” part of (3) follows. On the other hand, we know that we can split any accepting run τ of A into an accepting run τ_1 of A_1 (where no states of A_2 can occur) and an accepting run τ_2 of A_2 (where not states of A_1 can occur). By the induction hypothesis, $\sigma \in \sigma \rightsquigarrow V_1$ with $V_1(\lambda) = \sigma$ and $w \in P_2 \rightsquigarrow V_2$ with $V_2(n) = w_{\tau_2|_{Q_{2n}}} = (\sigma w)_{\tau|_{Q_{2n}}}$, from which the “only if” part follows. Property (4) is clear for $n = \lambda$ from the remarks made above about an accepting run of A and it follows from the induction hypothesis otherwise.

$P = \varepsilon \cdot P_2$ We note that $L(\varepsilon) \setminus C = C$. The proof is then analogous to the previous case.

$P = P_1^* \cdot P_2$ Let A_I be a deterministic automaton for I , A_{T_1} be a deterministic automaton for T_1 , $(A_2, f_2) = H(P_2, C_2)$ and $A = \pi((A_{T_1} \cdot A_{\square} \cdot A_2) \cap A_I)$. For $n \neq \lambda$, Property (1) follows from Proposition 4 and the fact that we do not lose information about the subautomata by taking the intersection and performing π . Moreover, $I \subseteq \mathcal{T}(1, P, C) \cdot \{\square\} \cdot \mathcal{T}(2, P, C)$, so $L(((A_{T_1} \cdot A_{\square} \cdot A_2) \cap A_I)) = I$. The result then follows for $n = \lambda$ since $\mathcal{T}(\lambda, P, C) = \pi(M(\lambda, P, C)) = \pi(I)$.

To prove unambiguity, we first note the following. Let B be the automaton obtained by computing $(A_{T_1} \cdot A_{\square} \cdot A_2) \cap A_I$. We assume that the states of B are of the form (q, s) with $q \in Q_{A_{T_1} \cdot A_{\square} \cdot A_2}$ and $s \in Q_{A_I}$. If $w \in L(A)$, then there must exist some $w' \in L(B)$ with $\pi(w) = w'$. Thus, there are $w_1 \in L(A_{T_1})$ and $w_2 \in L(A_2)$ such that $w = w_1 w_2$ and $w' = w_1 \square w_2 \in I$. By definition of I , w_1 and w_2 are unique. Let $\tau = ((q_0, s_0), k_0), \dots, ((q_m, s_m), k_m)$ be an accepting run of A on w . Since $A = \pi(B)$ and since $A_{\square}$ is minimal, we can find exactly one i for which $q_i \in I_{A_{\square}}$, $q_{i+1} \in F_{A_{\square}}$ and $k_i = k_{i+1} = |w_1|$. Necessarily, $q_{i-1} \in F_{T_2}$ and $q_{i+1} \in I_{A_2}$.

Suppose we have two accepting runs $\tau_1 = ((q_0, s_0), k_0), \dots, (q_m, s_m), k_m)$ and $\tau_2 = ((q'_0, s'_0), k'_0), \dots, ((q'_l, s'_l), k'_l)$ of A on $w = \sigma_1 \dots \sigma_n$. Then we can find i_1 and i_2 for τ_1 respectively τ_2 as described above. By definition of I , $k_{i_1} = k'_{i_2}$. Since both $(q_0, k_0), \dots, (q_{i_1-1}, k_{i_1-1})$ and $(q'_0, k'_0), \dots, (q'_{i_2-1}, k'_{i_2-1})$ are accepting runs of A_{T_1} on $\sigma_1 \dots \sigma_{k_{i_1}}$, and since A_{T_1} and A_I are deterministic, $((q_0, s_0), k_0), \dots, ((q_{i_1-1}, s_{i_1-1}), k_{i_1-1}) = ((q'_0, s'_0), k'_0), \dots, ((q'_{i_2-1}, s'_{i_2-1}), k'_{i_2-1})$. Since the automaton $A_{\square}$ is deterministic, $((q_{i_1}, s_{i_1}), k_{i_1}), ((q_{i_1+1}, s_{i_1+1}), k_{i_1+1}) = ((q'_{i_2}, s'_{i_2}), k'_{i_2}), ((q'_{i_2+1}, s'_{i_2+1}), k'_{i_2+1})$. Since A_2 is unambiguous by induction, the accepting runs $(q_{i_1+2}, k_{i_1+2}), \dots, (q_m, k_m)$ and $(q'_{i_2+2}, k'_{i_2+2}), \dots, (q'_l, k'_l)$ of A_2 on w_2 must be equal. So, $\tau_1 = \tau_2$, from which Property (2) follows.

Suppose $f_2(n) = (Q'_n, I'_n, F'_n)$. By the remarks about the matching derivations of $P_1^* \cdot P_2$ made in the proof of Proposition 4, we know that $w \in P \rightsquigarrow V$ iff $w = w_1 w_2$ with $w_1 \square w_2 \in I$, $w_1 \in P_1^* \rightsquigarrow V_1$ with $V_1(\lambda) = w_1$ and $w_2 \in P_2 \rightsquigarrow V_2$ where $V = V_1 \cdot V_2$. Since $w_1 \square w_2 \in I$, $w_2 \in C_2$. Suppose $w \in C$ and $w \in P \rightsquigarrow V$. By the induction hypothesis of Property (3), there exists a run τ_2 of A_2 on w_2 with $V_2(n) = w_{2\tau_2|_{Q'_n}}$. By definition of I and T_1 , there exists a run τ_1 of A_{T_1} on w_1 with $w_{1\tau_1|_{Q_{T_1}}} = w_1$. Then we can find $q \in I_{A_{\square}}$ and $q' \in F_{A_{\square}}$ such that

$\tau' = \tau_1, (q, |w_1|), (q', |w_1| + 1), \tau_2'$ is an accepting run of $A_1 \cdot A_{\square} \cdot A_2$ on $w_1 \square w_2$ (here, τ_2' is obtained from τ_2 by adding $|w_1| + 1$ to the indexes). Since we know that $w_1 \square w_2 \in I$, there is a run τ'' of A_I on it. By combining the τ' and τ'' , we can get an accepting run τ of A on $w_1 w_2$. It is easy to see that $w_{\tau|_{Q_1}} = w_1$ and $w_{\tau|_{Q'_n}} = w_2 \tau_2|_{Q'_n}$, from which the “if” part of Property (3) follows. The “only if” part follows by reasoning in the reverse direction. Indeed, if $w \in A$, $w \in \pi(I)$, so $w \in C$ and we explained earlier that a run τ of A on w gives us an accepting run of A_{T_1} on w_1 and an accepting run of A_2 on w_2 with $w = w_1 w_2$ and $w = w_1 \square w_2$ in I . Since the states of A_{T_1} and A_2 are disjoint, the induction hypothesis can be applied, immediately giving the desired result.

Property (4) immediately follows from the induction hypothesis if $n \neq \lambda$, and from the remarks made about the accepting run of A otherwise.

$P = (P_1 \cdot P_2) \cdot P_3$ Let $P' = P_1 \cdot (P_2 \cdot P_3)$, $(A', f') = H(P', C)$ and $f'(n) = (Q'_n, I'_n, F'_n)$. By construction, $I_1 = (Q'_1 \cup Q'_{21}) \cap I_{A'}$ and F_1 contains those nodes of F'_{21} from which there is a $q \in F'_{22}$ such that $\delta_{A'}(q, \lambda, q')$ and such that there is a path from q' to a state in $F_{A'}$.

We will first prove Property (3). Let $w \in C$ and $w \in P \rightsquigarrow V$. In the proof of Proposition 5 we noted that this holds iff $w \in P' \rightsquigarrow V'$ with $V'(\lambda) = V(\lambda)$, $V'(1)V'(21) = V(1)$, $V'(1n) = V(11n)$, $V'(21n) = V(12n)$ and $V'(22) = V(2)$. Furthermore, for $n \in \{\lambda, 1, 2, 21, 22\}$, $V'(n) \neq \perp$. By the induction hypothesis, we have an accepting run of τ of A' on w' with $V'(n) = w_{\tau|_{Q'_n}}$. The “if” part then follows by construction since $V(1) = w_{\tau|_{Q_1}} = \tau|_{Q'_1} \tau|_{Q'_{21}} = V'(1)V'(21)$. The “only if” part can be proven by similar arguments, reasoning in reverse.

Property (1) follows from the induction hypothesis and Proposition 5 if $n \neq 1$. Let $B = (Q_1, I_1, F_1, \delta_{A'})$ and suppose $w \in \mathcal{T}(1, P, C)$, i.e. there exists some $w' \in C$ with $w' \in P \rightsquigarrow V$ and $V(1) = w$. We know that there exist w_1, w_2 and w_3 such that $w = w_1 w_2$, $V(11) = w_1$, $V(12) = w_2$ and $V(2) = w_3$. Equally, $w' \in P' \rightsquigarrow V'$ with $V'(1) = w_1$, $V'(21) = w_2$ and $V'(22) = w_3$. Then there is a run τ of A' on w' with $w'_{\tau|_{Q'_1}} = w_1$, $w'_{\tau|_{Q'_{21}}} = w_2$ and $w'_{\tau|_{Q'_{22}}} = w_3$. Let $\tau|_{Q'_{21}} = (i_1, j_1)$ and $\tau|_{Q'_{22}} = (i_2, j_2)$. By the induction hypothesis of (4) on $n = 2$, $j_1 = i_2$ and we can find $q_1 \in F'_{21}$ and $q_2 \in I'_{22}$ such that $(q_1, j_1), \dots, (q_2, i_1)$ occurs in τ . Necessarily, $q_1 \in F_1$, so $w \in L(B)$. On the other hand, suppose $w \in L(B)$. Let $\tau_1 = (q_0, k_0), \dots, (q_l, k_l)$ be an accepting run of B on w . Then there is some $q_{l+1} \in I_2$ such that $\delta_{A'}(q_l, \lambda, q_{l+1})$ and such that there is a path from q_{l+1} to a state in $F_{A'}$. Let w_3 be the word spelled on this path. We can then construct $\tau_2 = (q_{l+1}, k_{l+1}), \dots, (q_m, k_m)$ such that τ_1, τ_2 forms the accepting run of A' on ww_3 . Obviously, $\min(\text{pos}(\tau, Q_1)) = 0$, $\max(\text{pos}(\tau, Q_2)) = |ww_3|$, $k_l \in \text{pos}(\tau, Q_1)$ and $k_{l+1} \in \text{pos}(\tau, Q_2)$. Is it possible that $\max(\text{pos}(\tau, Q_1)) > |w| = k_l$ or that $\min(\text{pos}(\tau, Q_2)) < |w| = k_{l+1}$? Suppose it is, then we would have $ww_3 \in P \rightsquigarrow V$ with $V(1) = \sigma_1 \dots \sigma_{j_1}$ and $V(2) = \sigma_{j_2} \dots \sigma_n$ with $n = |ww_3|$ and either $j_1 > |w|$ or $j_2 < |w|$. Now, necessarily, $ww_3 = V(\lambda)$ which, as we noted in the proof of Proposition 5, should equal $V(1) \cdot V(2)$. However, the length of $\sigma_1 \dots \sigma_{j_1} \sigma_{j_2} \dots \sigma_n$ is always greater than n , contradiction. As such $ww_3 \in C$ and $ww_3 \in P \rightsquigarrow V$ with $V(1) = w$, hence $w \in \mathcal{T}(1, P, C)$.

Property (4) also follows from these observations while Property (2) follows directly from the induction hypothesis.

$P = (P_1 + P_2) \cdot P_3$ Let $P' = P_1 \cdot P_3 + P_2 \cdot P_3$, $(A', f') = H(P', C)$ and $f'(n) = (Q'_n, I'_n, F'_n)$. Then, $A' = A_1 \cup A_2$ where $(A_1, f_1) = H(P_1 \cdot P_3, C)$, $(A_2, f_2) = H(P_2 \cdot P_3, C - L(P_1 \cdot P_3))$ and $f'(\lambda) = A$, $f'(1n) = f_1(n)$ and $f'(2n) = f_2(n)$. Property (1) follows from the induction hypothesis on $P_1 \cdot P_3$ and $P_2 \cdot P_3$, and the combination of Propositions 6 and 1 if $n \neq \lambda$. For $n = \lambda$, we showed in the proof of Proposition 6 that $w \in P \rightsquigarrow V$ iff $w \in P \rightsquigarrow V'$. The property then follows from the induction hypothesis, since $V(\lambda) = V'(\lambda) = w'$. Property (2) follows directly from the induction hypothesis and the fact that a word cannot be in $L(P_1 \cdot P_3) \cap C$ and $L(P_2 \cdot P_3) \cap (C - L(P_1 \cdot P_3))$ at the same time. Property (3) follows from the induction hypothesis, and the relation between V and V' when $w \in P \rightsquigarrow V$ and $w \in P \rightsquigarrow V'$ we gave in the Proof of proposition 6. In the same proof we (indirectly) showed that when $w \in P \rightsquigarrow V'$ holds, either $V'(11)$ and $V'(12)$ are different from $\perp$ or $V'(21)$ and $V'(22)$ are, but not both. Property (4) follows from this observation and the induction hypothesis.